

- *revolutionary and safe **Cool-Touch** casing*
- *80% reduced light output*
- *safe for use in wet areas*

## Installation in stables and wash-down bays

### HANDLE WITH CARE


- Do not subject heater to physical shocks.
- Do not touch the infrared element with your fingers - quartz halogen elements can fail if their surface is contaminated with grease or dirt.
- Ensure the reflector and emitter element are clean before use.
- Heater front will become hot in use - do not touch until cool.
- Ensure nearby surfaces do not become overly hot.

BaskZone® infrared emitters are designed to be used singly - for example to provide effective, economical background warmth in stables. Alternatively they may be joined together to produce high performance twin emitters for use in an Equine SunSwitch Equarium®. The linking plates and wall mounting brackets are supplied.

BaskZone® emitters are fully-compatible with Equine SunSwitch controllers. Compatibility with other controllers and timeswitches cannot be guaranteed and their use may damage the emitter and affect your warranty. If in doubt, please ask!

Always ensure the power cables are fixed securely (e.g. in conduit or trunking) and are safely out of reach of the horse. The cables must also be outside of the radiant heating zone of the emitter. There should be an unimpeded free air space above the Bask Zone of at least 32cm, and clearance to each side of at least 100cm. There should be a free-air space in front of the emitter of at least 100cm.

BaskZone® emitters should be installed with the elements horizontal to within 5°. Emitters are normally installed above the horse's head and are angled down towards the horse's body.

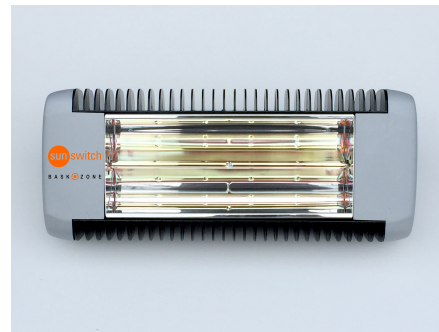

#### Cleaning instructions

Your BaskZone® is IPX5 rated, which means it can be rinsed clean when necessary. To do this, isolate it from the power supply and allow it to cool down. Rinse the heater housing gently with clean water, removing any external deposits with a sponge or soft cloth. Ensure there are no loose deposits on the infrared element. Allow to dry.

#### Servicing


BaskZone® is fitted with an 'Easy Fit' replaceable element. In case of problems, or for service and support please contact Equine SunSwitch on 01424 883344.

#### Disposal

In accordance with European Directive 2002/96/EG please take this appliance to the collection points provided by your waste management authority for recycling domestic appliances.



Wall-brackets

Linking plates

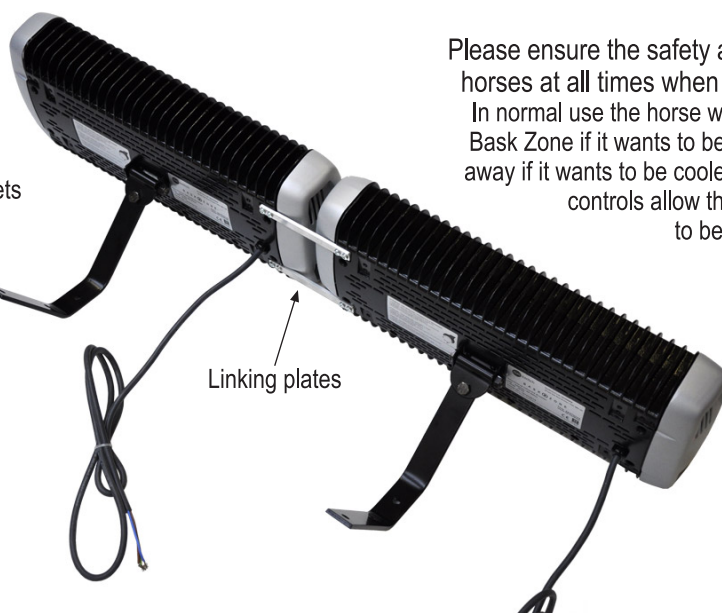

Please ensure the safety and comfort of your horses at all times when using BaskZone®. In normal use the horse will move closer to the Bask Zone if it wants to be warmer, and further away if it wants to be cooler. Equine SunSwitch controls allow the overall heat output to be adjusted for comfort in any setting.

Power output: 1.5kW.  
Power supply: 230-250Vac ~ 50-60Hz.  
Ingress protection: IPX5 (moisture and splashproof)  
Dimensions: 46 x 19.5 x 8.5cm (whd)

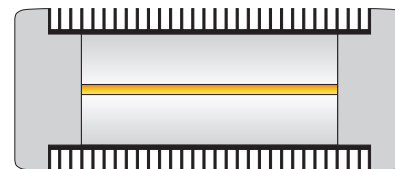

Equine SunSwitch  
SunSwitch Ltd, Broad Oak, East Sussex, TN31 6BX  
[www.equinesunswitch.co.uk](http://www.equinesunswitch.co.uk)

Tel. 01424 883344

SunSwitch Limited cannot be held responsible for any loss or injury resulting from the use or handling of this product. If in any doubt please contact a qualified electrician. 'BaskZone', 'SunSwitch' and 'Equarium' are registered trademarks. Specifications may change without notice.